



TEMPLATE DESIGN INSTRUCTIONS – SQUARE GLASS ASHTRAY



INSTRUCTIONS

WHEN OPENING THE TEMPLATE FILE YOU WILL FIND TWO LEVELS OF WORK

PRINTING CUSTOMIZATION

- ① **LEVEL " TEMPLATE ":**
Leave the level locked.
- Ⓐ **SAFE AREA:**
All important works of art (logo, text, ecc.) must be placed within the green line.
- ② **LEVEL YOUR DESIGN:**
Insert your graphics into the level, inside the blue line, it corresponds to the printable area.
- Ⓑ **DESIGN:**
The file must be a vector or image.
 - The file must be placed inside the safe area. (example) Ⓒ

⚠ATTENTION:
The background must be filled with a color/texture.

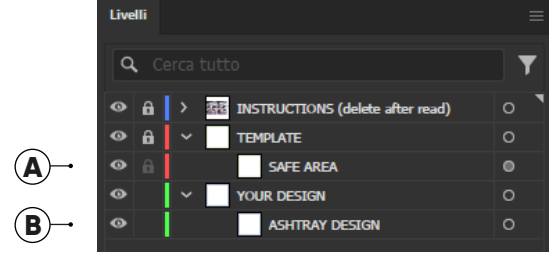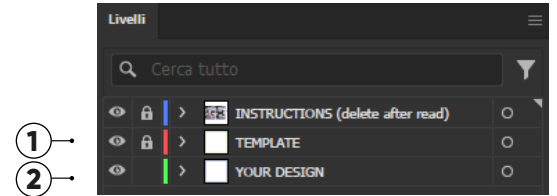

DESIGN IMAGES:
In the basic file sent by the customer, the graphics must be a **vector** or in the case of **images**, they must be attached or incorporated into the final design.
In the case of PNG images we recommend a png format with 300 DPI

COLOR MODE:
Only **CMYK** colours are possible to print

TEXT:
If there is text in your design, you need to convert into a text outline.

FILE FORMATS:
Save the file in pdf in high quality.
• It is important to keep the **TEMPLATE** and **YOUR DESIGN** layers divided

To submit PDF, EPS, AI, PSD, JPG, PNG files at commerciale@ilmyo.it



ISTRUZIONI D'USO TEMPLATE - POSACENERE VETRO QUADRATO

ISTRUZIONI

QUANDO APRIRAI IL FILE DI TEMPLATE TROVERAI TWO LIVELLI DI LAVORO

PERSONALIZZAZIONE STAMPA

1

LIVELLO "TEMPLATE":

Lasciare il livello bloccato.

A

AREA SICURA:

Posizionare le parti principali (loghi, testi, ecc.) dentro il margine delimitato dalla linea verde.

2

LIVELLO "YOUR DESIGN":

Inserisci la grafica in questo livello, all'interno della linea blu, questa corrisponde all'area di stampa.

B




DESIGN:

Il file deve essere un immagine vettoriale.

- Il file deve essere inserito dentro il margine di sicurezza. (esempio) C


ATTENTION:

Lo sfondo deve essere riempito con un colore/texture.

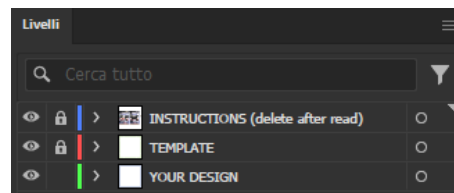

1

2

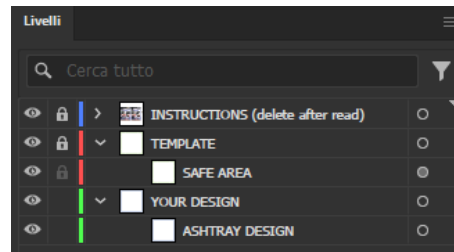

A

B

D



DESIGN IMAGES:

Nei file forniti dai clienti, le grafiche devono essere **vettoriali**, oppure, nel caso di **immagini raster**, devono essere incorporate all'interno del file.



Nel caso di immagini in formato PNG raccomandiamo una risoluzione di 300 DPI



IMPOSTAZIONI COLORE:

È possibile stampare solo colori **CMYK**.



TESTI:

Nel caso siano presenti testi all'interno del file, è necessario convertirli in traccati.



FORMATO FILE:

Salvare il file in formato PDF per stampa di alta qualità.

- È molto importante mantenere i livelli **TEMPLATE** e **YOUR DESIGN** divisi.

Invia i tuoi file PDF, EPS, AI, PSD, JPG, PNG a: commerciale@ilmyo.it

GLASS ASHTRAY

